

# 23MK-HiTech

Air handling units for industry



102

# 31MK

Air handling units with reduced thickness



104

# 24MK

Cabinet air handling units



106

# 10MK

High efficiency heat recovery unit



112

# 07MK

Ductable fan coil units



118

# 01MK

Centrifugal extract fan box



126



# 23MK

## *An air handling unit for the service sector*

The 23MK air handling series is characterized by sturdiness, flexibility, reliability and a deep industrialization, which guarantees speed in delivery times, whilst not renouncing to extreme versatility and flexible configuration.

These features make it possible to maximize the combination of required performance, air flow speed on the coils, dimensional compactness and investment containment.


The 23MK air handling units are available for a range of capacities between 1000 and 80000 m<sup>3</sup> / h and with total pressures up to 2500 Pa. However, in specially designed units, higher values of flow rate and pressure can be accommodated for, based on specific customer requirements.



MEKAR S.r.l. participates in the ECP programme for AHU. Check ongoing validity of certificate: [www.eurovent-certification.com](http://www.eurovent-certification.com)



# The details, *make the difference*

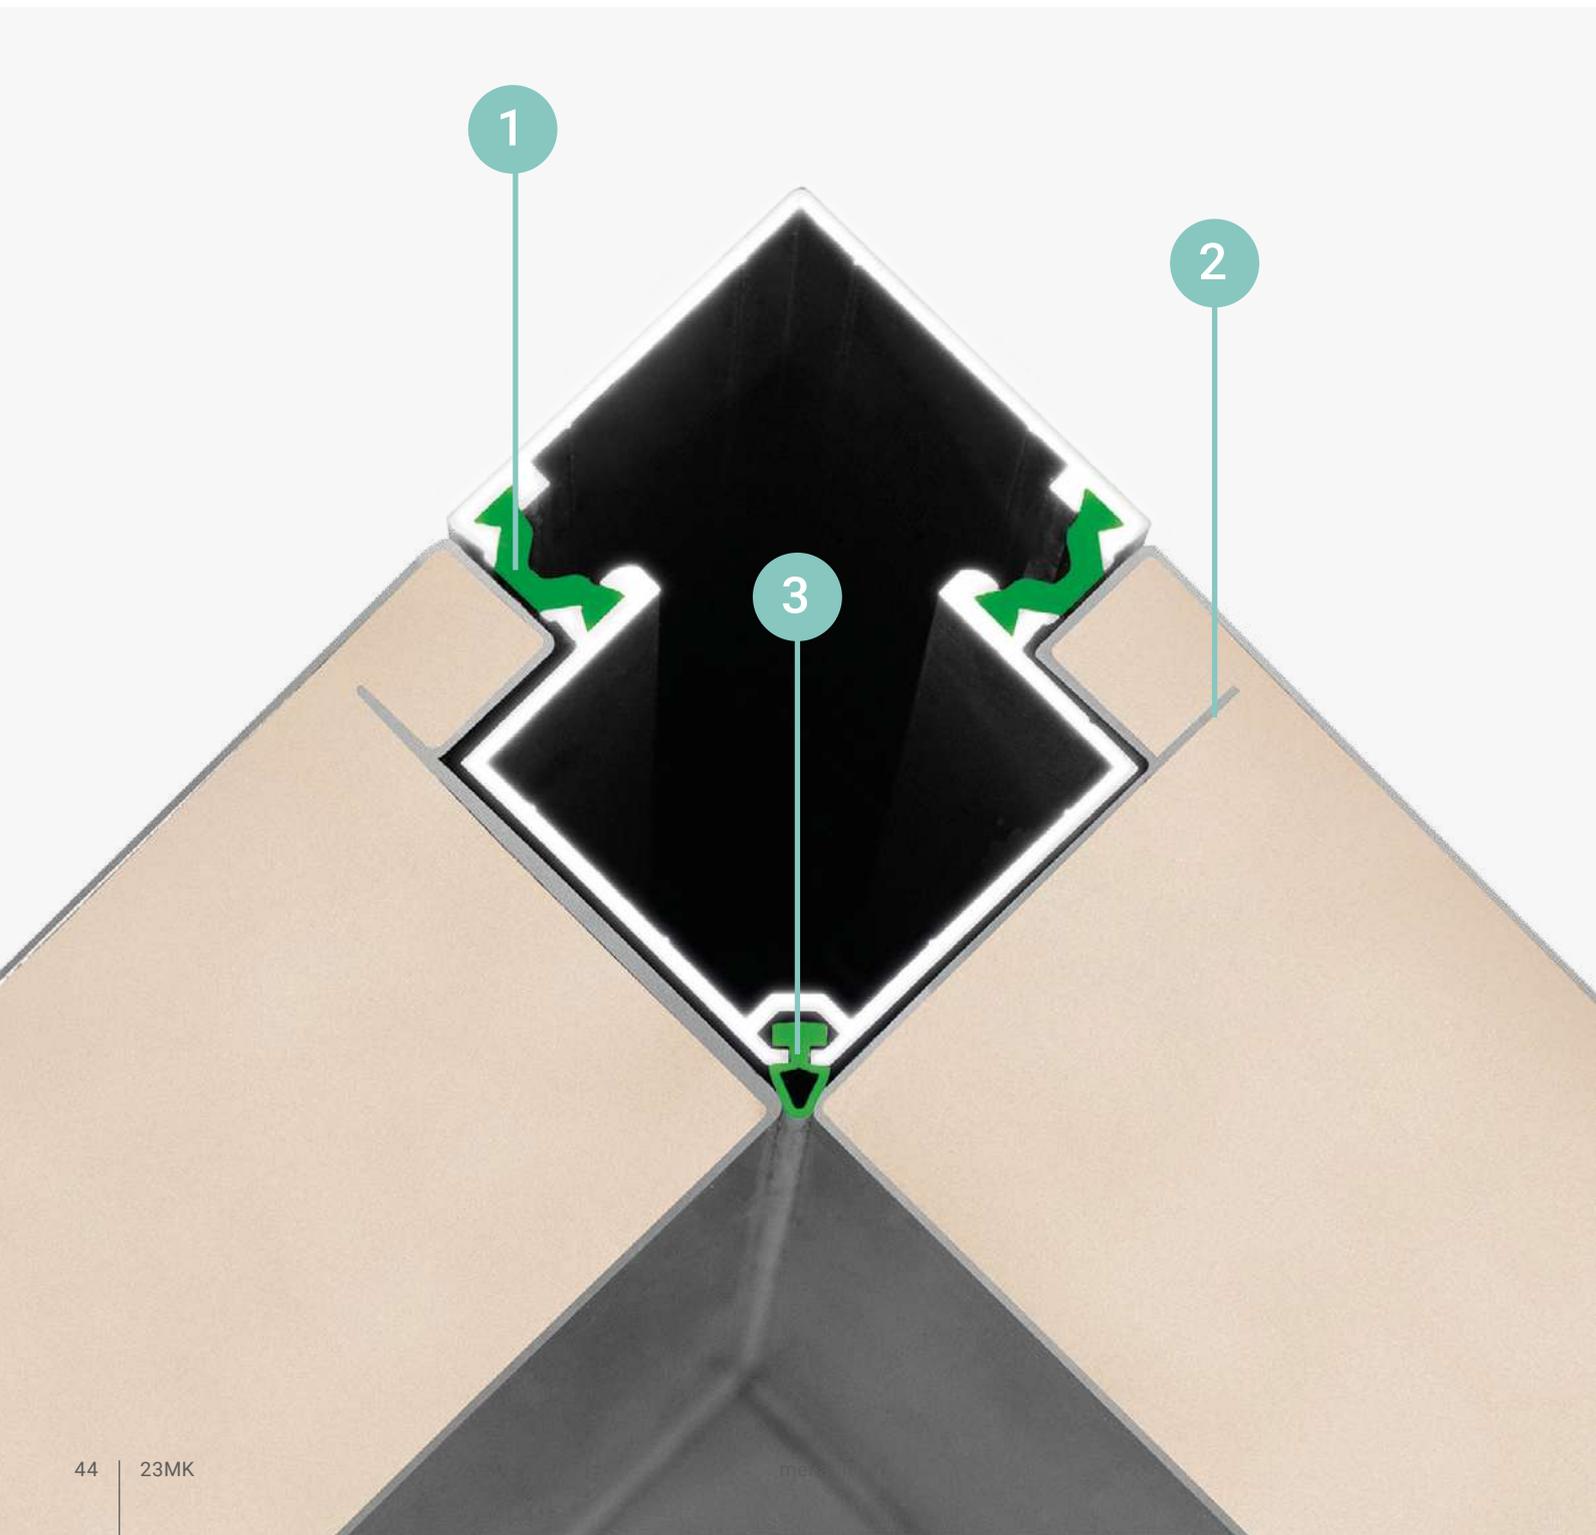



## STRUCTURAL PROFILES

Our exclusive Mekar **"MK-Pro 2.0"** aluminium profile is specially designed and developed to optimize the construction aspect of the range. Available in the aluminium version with a natural finish or in anodized aluminum; each can come with or without a thermal break.

1


The thermal cut is guaranteed by inserting a breaker segment made of extruded polyamide thermal conductivity  $0.30 \text{ (W/m}^\circ\text{K)}$ , which guarantees an optimal compromise between structural strength and maximum insulation capacity. It is also possible to select the profile even in the configuration injected with polyurethane foam density  $45 \text{ kg/m}^3$ , thermal conductivity  $0.024 \text{ (W/m}^\circ\text{K)}$ .

2

The particular conformation of the geometries and the constructive choices adopted make it possible to completely reduce the contact between the external and internal surfaces, thus guaranteeing a total thermal bridge panelling.

3

The sealing gasket directly integrated on the corner profile completely avoids the contact between the treated air inside the unit and the external surface. In addition, the gasket eliminates the presence of the typical gap between the panels, guaranteeing a continuous surface, free of gaps where dirt can be deposited, for the benefit of a simpler and more effective sanitizing of the surfaces.

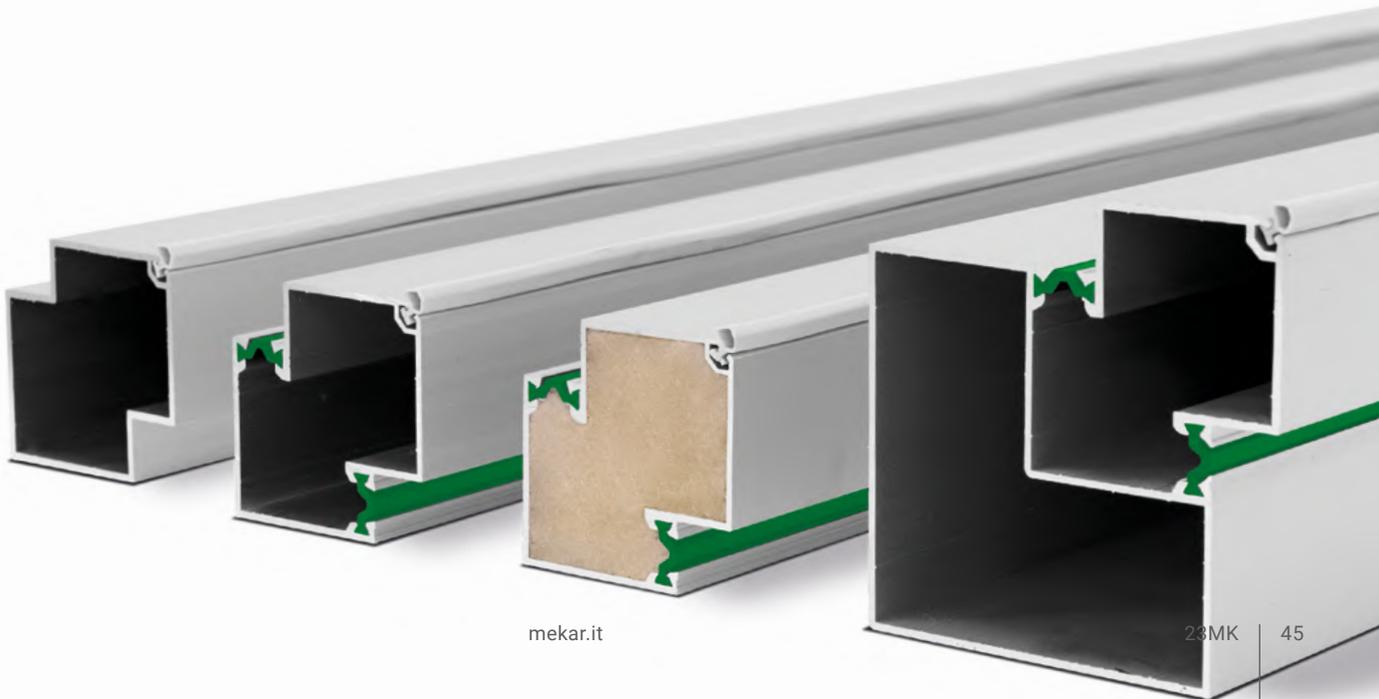



# The details, *make the difference*





### INTERNAL SURFACES

The internal surfaces are completely smooth and free of screws, since all the fixings are confined inside the aluminium profile. This avoids stagnation of dirt and makes maintenance, cleaning and sanitizing operations easier, faster and safer.



### ANGULARS AND BASE

Structural corners made of injection-molded PA6 Nylon, reinforced with glass fibre or, alternatively and optionally, made internally in stainless steel. The base is instead made of press-bent sheet metal of high thickness and is selectable in multiple variations in terms of material, thickness, finish and height.



### PANELS AND DOORS

In order to preserve the integrity of the insulating materials and facilitate cleaning operations, each screw used to fasten the panels is coupled to an insert made of Nylon, appropriately developed to guarantee the complete integrity of the panelling, even in the face of multiple interventions. The unit can also be configured with multiple types of fixed or adjustable hinges, standard or thermal cut handles, adjustable and with a safety key ,or, with ratchet latches with reinforced omega for doors under pressure.



### PANELING

Sandwich panels made in a wide range of materials with a thickness of 60mm (standard) or 100mm (optional). The construction details adopted in the exclusive geometry of the Mekar panel make it possible to reduce contact between the whole internal panel and external panel, guaranteeing an excellent thermal cut thanks to a suitable gasket fixed in the perimeter part of each panel.

The inner lip of the gasket ensures pressure tightness on its stop against the frame.

## 60 mm

(Standard)

Casing classification according to EN1886

Mechanical resistance	D1
leakage	L1
filter by-pass	F9
transmittance	T2
thermal bridges	TB2/TB3

## 100 mm

(Optional)

Casing classification according to EN1886

Mechanical resistance	D1
leakage	L1
filter by-pass	F9
transmittance	T1
thermal bridges	TB2



### THERMAL-ACOUSTIC INSULATION

Configurable in two alternatives, with insulation in injected polyurethane foam density 45 kg/m<sup>3</sup>, thermal conductivity 0.024 (W/m<sup>2</sup>K) and reaction class to fire B2 or with mineral wool insulation density 90 kg/m<sup>3</sup>, thermal conductivity 0.039 (W/m<sup>2</sup>K) which offers excellent performance in terms of thermal / acoustic insulation and excellent fire behaviour with reaction class A1.



# Certified acoustic data

our products have been tested at the laboratory Istituto Giordano  
(ref. no. test report 377215 - 377220)

**ISTITUTO GIORDANO**  
ACCREDIA  
LAB N° 0021 L

Reporto di prova n. 377215 del 18 novembre 2020  
Page 6 di 10  
Pagina 6 di 10

**RAPPORTO DI PROVA N. 377215**  
TEST REPORT No. 377215

Clienti  
**MECAR S.p.A.**  
Via Galvani 10, 37069 BASSANO DEL GRAPPA (VI) - Italia

Objetto  
**pannello denominato "PVI0-2008-UM-100"**  
panel named "PVI0-2008-UM-100"

Obiettivo  
**misurazione in laboratorio dell'isolamento acustico per via aerea secondo la norma UNI EN ISO 10140-2:2010**  
laboratory measurements of airborne sound insulation in accordance with standard UNI EN ISO 10140-2:2010

Risultati  
 **$R_w (K, C_s) = 51 (-4, -11) \text{ dB}$**

**Camera emittente**  
Source room

**Camera ricevente**  
Receiving room

Particolare del posizionamento dell'oggetto nell'apertura fra le due camere dell'ambiente di prova  
Close-up of item positioning in the opening between the two rooms of the test environment

Intervallo di bande di 1/3 d'ottava compreso tra 100 Hz e 5000 Hz, il potere fonosolante "R" è stato calcolato utilizzando la formula seguente:

$$R = L_1 - L_2 + 10 \log \frac{S}{A}$$

$L_1$  = livello medio di pressione sonora nella camera emittente, in dB, generato con rumore rosa;  
 $L_2$  = livello medio di pressione sonora nella camera ricevente, in dB, corretto del rumore di fondo e calcolato utilizzando la formula seguente:  
 $L_2 = 10 \log(10^{L_{2s}} + 10^{L_{2n}})$

dove:  $L_{2s}$  = livello medio di pressione sonora combinato del segnale e del rumore di fondo, in dB;  
 $L_{2n}$  = livello medio del rumore di fondo, in dB;

**Caratteristiche delle camere di prova:**  
 of test rooms:  
 Camera emittente: 50,6 m<sup>3</sup>  
 Camera ricevente: 85,2 m<sup>3</sup>

**Valutazione del potere fonosolante:**  
 of sound reduction index and adaptation terms:  
 $R_w (K, C_s) = 51 (-4, -11) \text{ dB}$

**Valutazione del potere fonosolante "R<sub>w</sub>"**  
 sound reduction index "R<sub>w</sub>" measured in steps of 0,5 dB  
 (Assessment of measurement "R<sub>w</sub>")  
 $R_w = (51,8 \pm 1,2) \text{ dB}$   
 $K = (+0,5 \pm 1,0) \text{ dB}$   
 $C_s = (0,1 \pm 1,0) \text{ dB}$

**Curva di riferimento / Reference curve**  
 - Linee sperimentali / Test plots  
 - Curva di riferimento / Reference curve

Responsabile Tecnico di Prova  
 Chief Test Technician  
 (Geom. Omar Nanni)

Il Responsabile del Laboratorio  
 of Acustica e Vibrazioni  
 Head of Acoustics and Vibrations Laboratory  
 (Dott. Andrea Cucchi)

The air handling units consist of a casing that contains all the air handling components inside.

The casing panels type can be chosen among various combinations of elements, in particular the thickness of double skin sandwich panel (60 or 100 mm), the insulating material type (polyurethane or mineral wool) and inner and outer skin sheet thickness (from 0.6 up to 1 mm).

The combination of these elements allows different noise absorption levels.

MEKAR has tested various combinations of paneling at the Giordano Institute with laboratory measurements of airborne sound insulation according to UNI EN ISO 10120-2: 2010

Here are the certified data of some solutions:

Panel "PV06-ZN06-PU-60"  $R_w = 29$  dB

Panel "PV10-ZN08-PU-60"  $R_w = 31$  dB

Panel "PV10-ZN08-LM-60"  $R_w = 46$  dB

Panel "PV10-ZN08-LM-100"  $R_w = 51$  dB




# Innovation and constant search *for maximum efficiency*



For over 45 years we have been committed to research, design and production of solutions that aim to provide efficient, reliable and high-performance products in line with the most stringent regulations in force.

To always try to achieve these goals, we strongly value the aspect of continuous evolution and research, in order to develop, evaluate and validate increasingly innovative solutions, which are able to respond to the multiple needs of a constantly changing market. Thanks to dedicated engineering, a team of highly specialized technicians and a profitable collaboration with partners and suppliers, we are now able to offer excellent solutions, which allow us to express the best results obtainable in the world of air treatment, dedicated to the individual specifications dictated by the customer in a timely fashion.

To follow, a brief introduction of some of the solutions that can be implemented in Mekar air handling units, which aim to offer the most innovative solutions available on the market today.

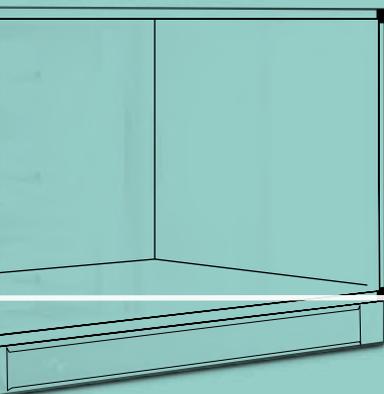

# Focus Point



Efficiency



Air quality



Reliability




Energy saving



Punctual management

# Focus Point

## *Oval Tube Technology*

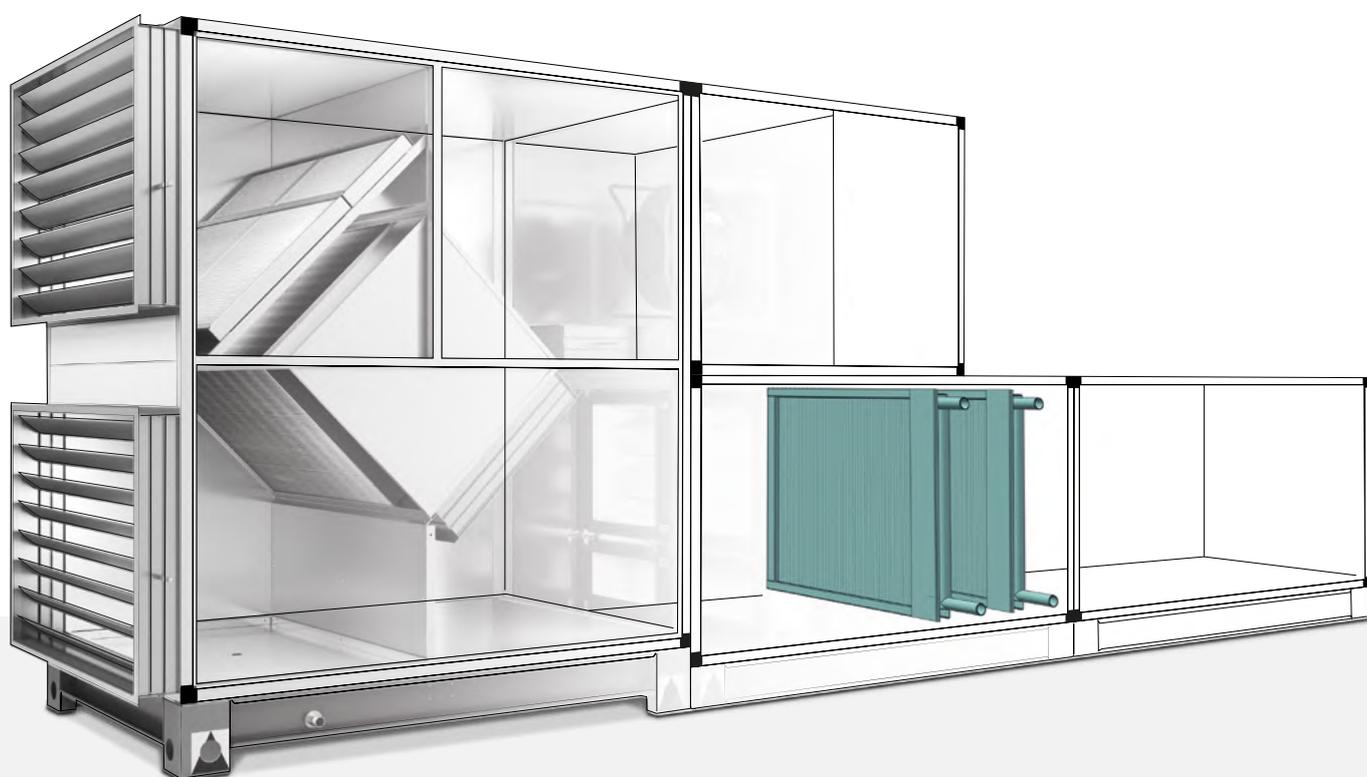


Reduction in consumption


Energy efficiency in buildings is forcing heat-carrying fluid generators to work with increasingly lower thermal levels in order to increase the performance of the generators themselves. Consequently, for the same power output, the heat exchange coil of the AHU requires a greater surface area to the detriment of the pressure drop and therefore, of the overall electrical absorption of the AHU.

It is for these reasons that MEKAR, as an alternative to the traditional round tube heat exchangers, proposes the OVAL TUBE, technology which guarantees an improvement in performance up to 15% and a reduction in airside pressure losses over 40%.

## Round tube vs oval tube

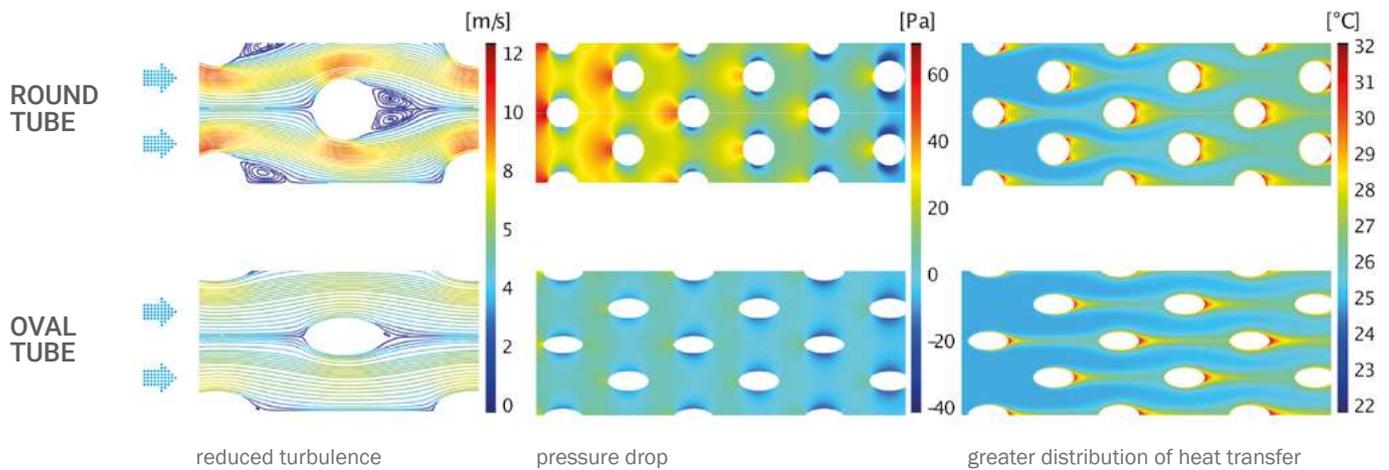


## Air side pressure drop

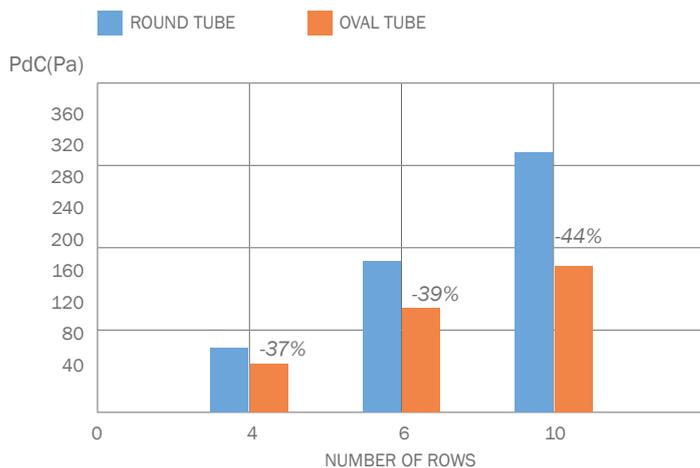

# Focus Point

## *Hybrid adiabatic humidification*

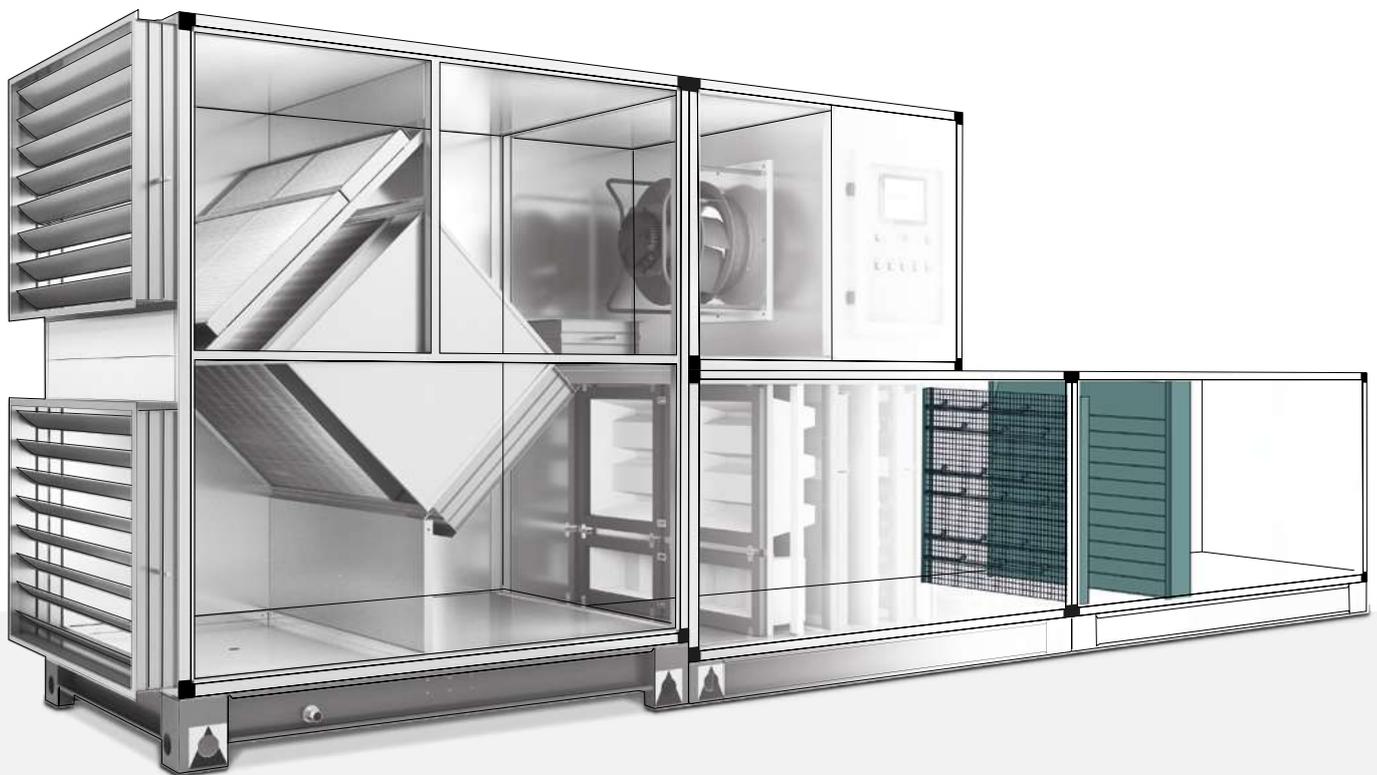

Compact dimensions and high humidification, VDI 6022 certified.

Water is a precious commodity and the efficiency of humidification systems inside CTAs is important to avoid waste especially in production systems with reverse osmosis.

Adiabatic humidification systems combine the use of atomization nozzles, capable of generating a homogeneous mist, which evaporates along the process at a subsequent stage composed of ceramic elements that absorb the remaining water and completely re-evaporate it.

The features and the main benefits of this innovative system are listed below:

- 95% humidification efficiency.
- Reduced absorption lengths (from 60 cm).
- Low air side pressure drop (40 Pa at 2 / ms).
- Absence of aerosol components in the air.
- Institut Fresenius and VDI 6022 certification.
- Patented silver ionization group.
- Reduced electricity consumption.
- Reduced maintenance.
- Easy and quick installation.



# Two adiabatic methods, cleverly combined.

Hybrid humidification is based exclusively on the advantages of two types of humidification: atomization and evaporation. In this way, there is a lasting solution to the problems that may occur in the event of the separate use of these techniques. In terms of hygiene, energy efficiency and cost, the humidification system is the first choice.

## **Atomization**

Humidification water is atomized by low-pressure molecular atomizers. The atomising nozzles have an adjustable spray mist and are optimally distributed over the entire section of the appliance. This arrangement allows a high evaporation effect and a homogeneous distribution of humidity.



## Evaporation

The patented evaporation unit in high-quality ceramic is located at the end of the humidification section. It captures the humidification water and achieves the best possible post-evaporation. The ceramic allows the maximum use of the precious humidification water. At the same time, it prevents the accumulation of water in the downstream components.


Hybrid humidification always guarantees air free of aerosols, making it more hygienic.

## Adjustable molecular atomizing nozzles

Low-pressure operation already allows considerable energy savings, thanks to low compression work. Low-pressure molecular nozzles work in the range of 2 to 10 bar in an absolutely wear-free way.


The nozzle itself is housed on a flexible carrier clip that can be adjusted in a straight position or with an angle of 15°.

The nozzle spray cone can therefore, be directed so that even the humidification water reaches the evaporation ceramic completely in the peripheral critical areas.

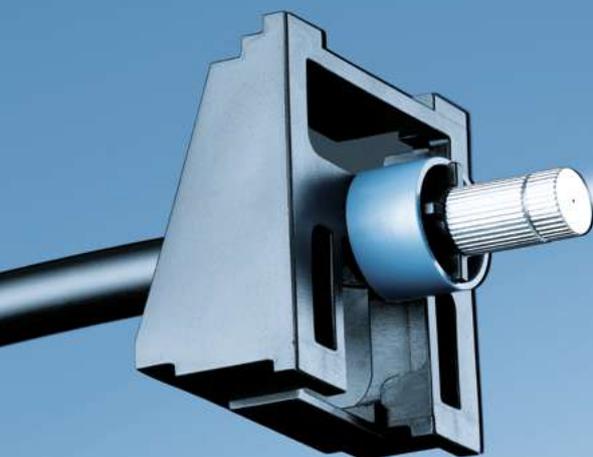

# Focus Point

## *Compact isothermal humidification*

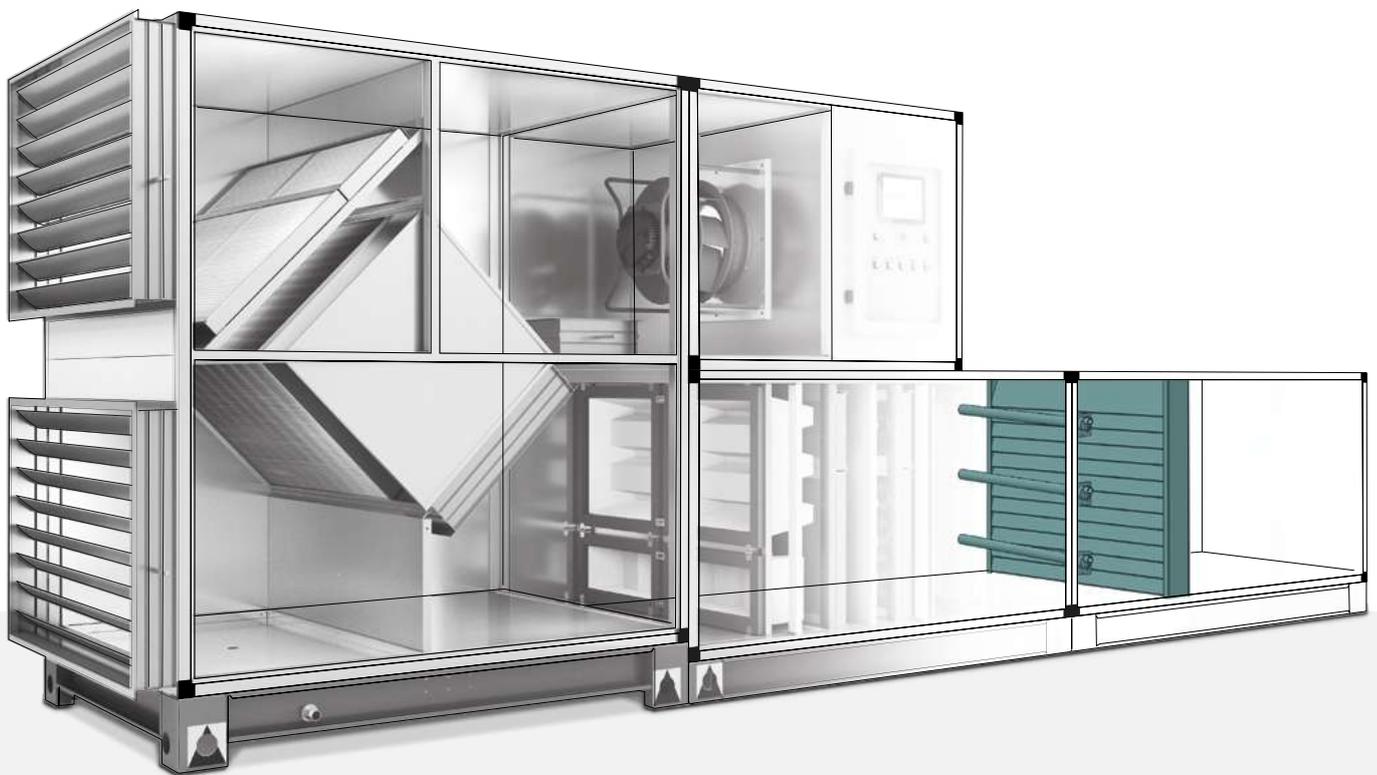


Compact dimensions and  
high humidification efficiency

Always with great attention to space, MEKAR offers a multi-lance steam distribution system that reduces absorption distances compared to traditional steam distribution systems.


The patented central flow injector nozzles extract the steam from the centre of the distribution pipes, where it is hot and drier. In this way, it is ensured that the steam is introduced into the humidification section without the formation of droplets. Otherwise, when the steam touches the cooler outer surfaces of the tubes, it may condense.

A uniform distribution of the nozzles through the entire distribution system ensures a homogeneous exit in the airflow and reduces the humidification path compared to traditional steam pipes.

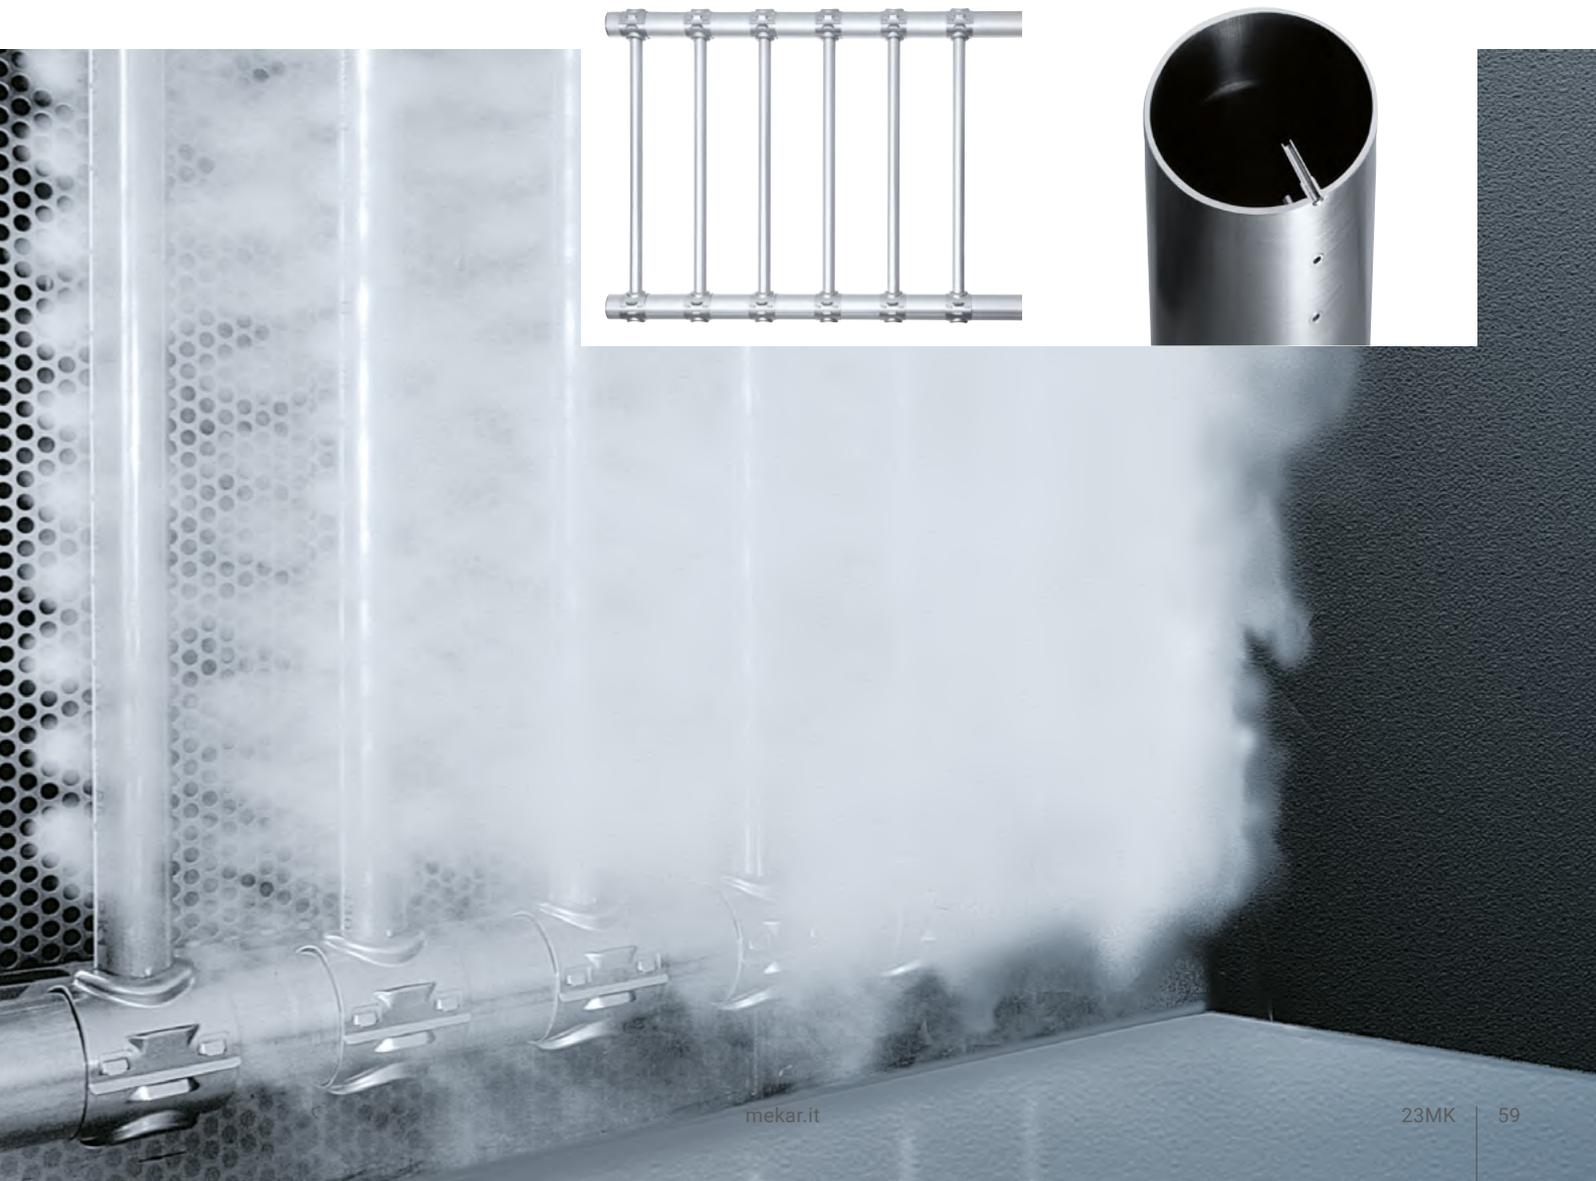

# Focus Point


## *Electrostatic filtration*

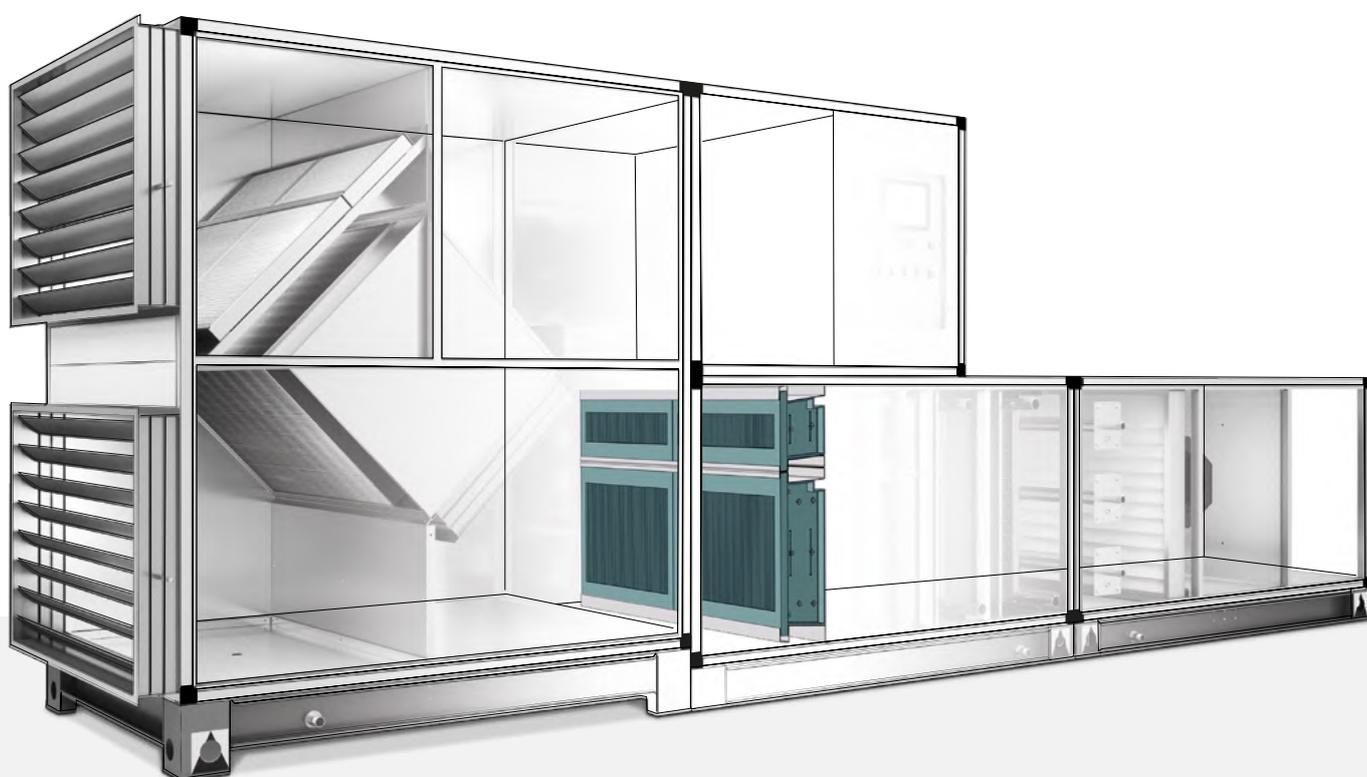

Reduction in consumption  
and maintenance cost

With the ultimate aim of guaranteeing a filtration characterized by maximum efficiencies and able to meet the increasingly stringent energy-saving requirements, Mekar can also supply units equipped with an innovative type of extremely high-performance filters and certified according to UNI EN ISO16890. The high-efficiency electrostatic filtration systems are already widely used and tested in civil and industrial environments and are based on the phenomenon of electrostatic precipitation characterized by different advantages which include:

1. Extremely high filtration efficiencies, with efficiencies greater than 99%.
2. Contemporary removal of microorganisms such as bacteria, yeasts, moulds and germs.
3. Negligible pressure drop through the filter.
4. Duration of filters equal to the useful life of the entire unit, with minimum maintenance requirements.
5. A very high degree of product reliability

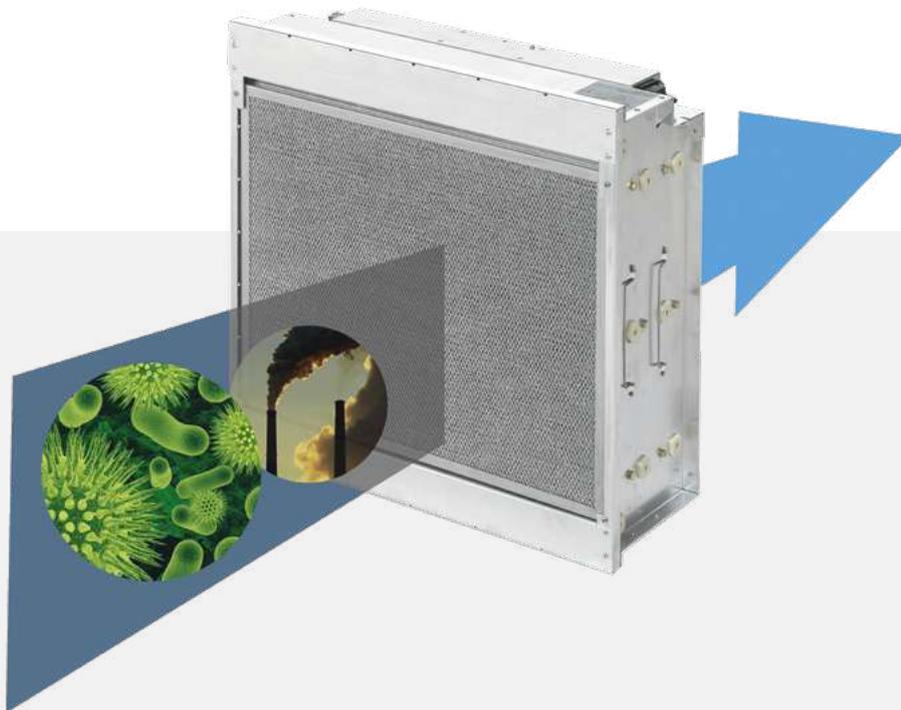

All this allows the recovery in a very short time of the major initial investment compared to a traditional filtration system, for example of the pocket type, thanks to the reduction of the electric consumption of the ventilating sections. Since the pressure drop is very low, the costs for maintenance are extremely inferior since periodic replacement of the filters is not necessary.


Practical cases show that the return on investment typically occurs in a few months.

With the new UNI EN ISO 16890 classification, the electrostatic filter proposed by MEKAR is the only air filter with real energy classification A + overtime.





# Case Study


Unit equipped with pocket filter

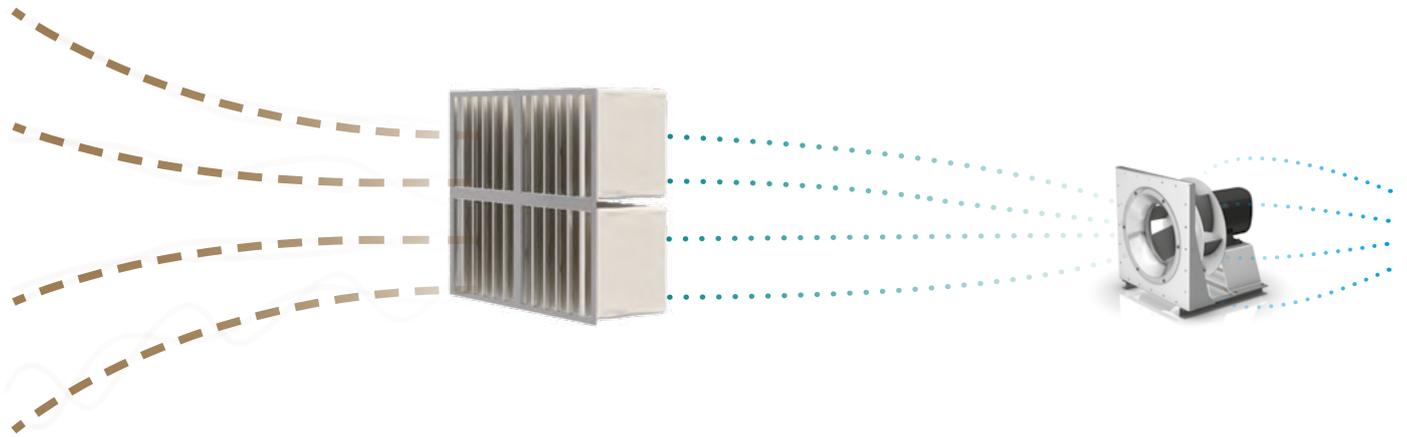

Energy Class	Annual consumption (kwh/a)	Filtration class EN ISO 16890	Initial Pressure Drop (Pa)	Final Pressure Drop (Pa)	Annual replacement
<b>C</b>	2400	ePM <sub>1</sub> 70%	130	300	3

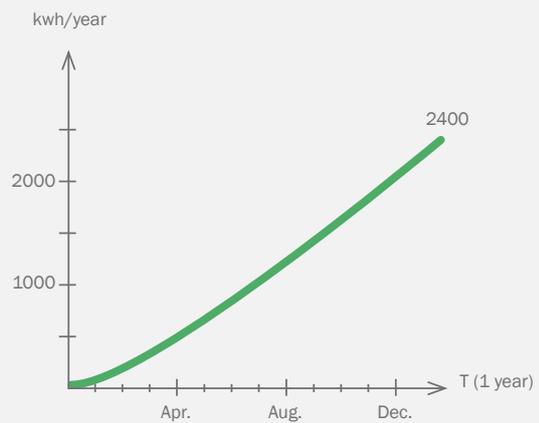
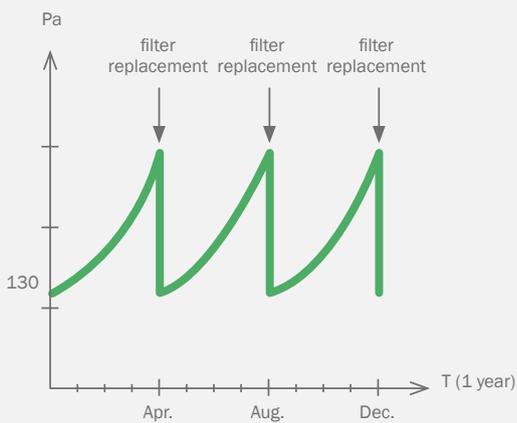


## Unit equipped with electrostatic filter

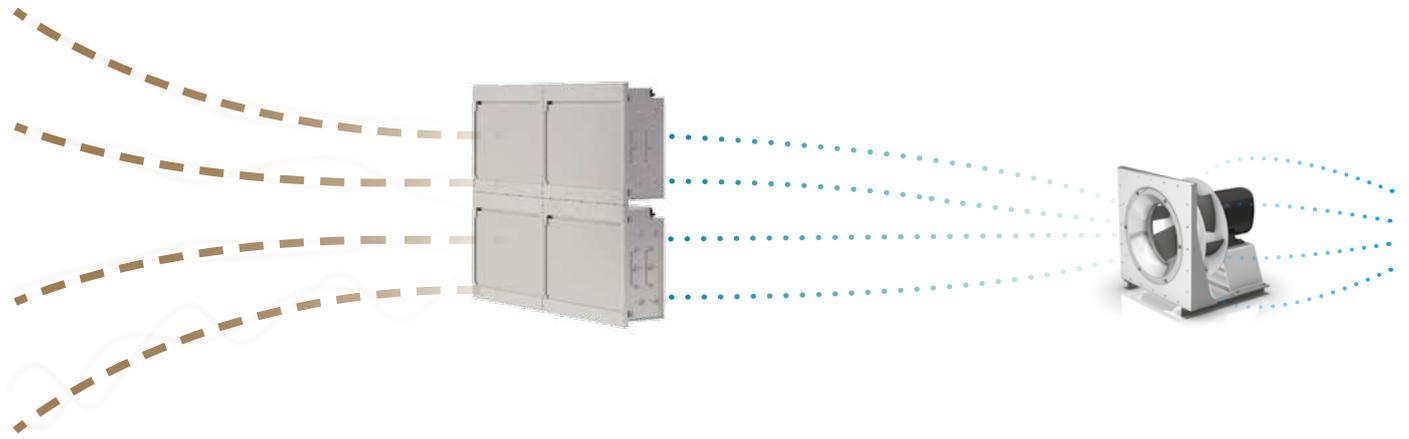


Energy Class	Annual consumption (kwh/a)	Filtration class EN ISO 16890	Initial Pressure Drop (Pa)	Final Pressure Drop (Pa)	Annual replacement
<b>A+</b>	702	ePM <sub>1</sub> 70%	44	64	0

Data refer to the single filter cell with an air flow of 3,400 m<sup>3</sup> / h and operation of 6,000 hours.

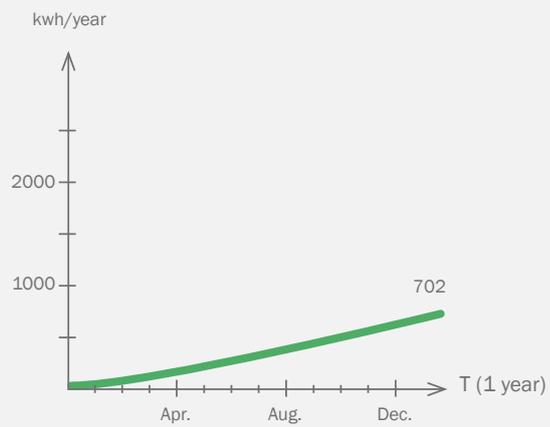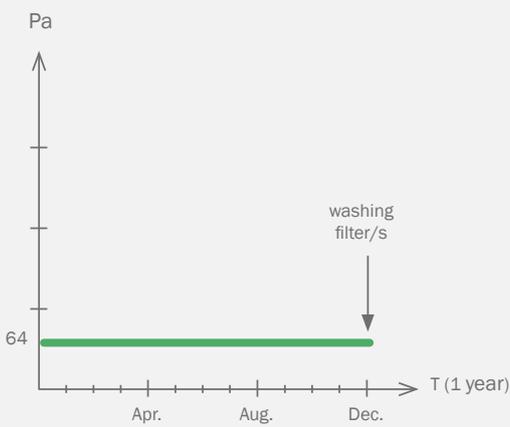

# Focus Point

## *Photo-Catalytic Oxidation System*

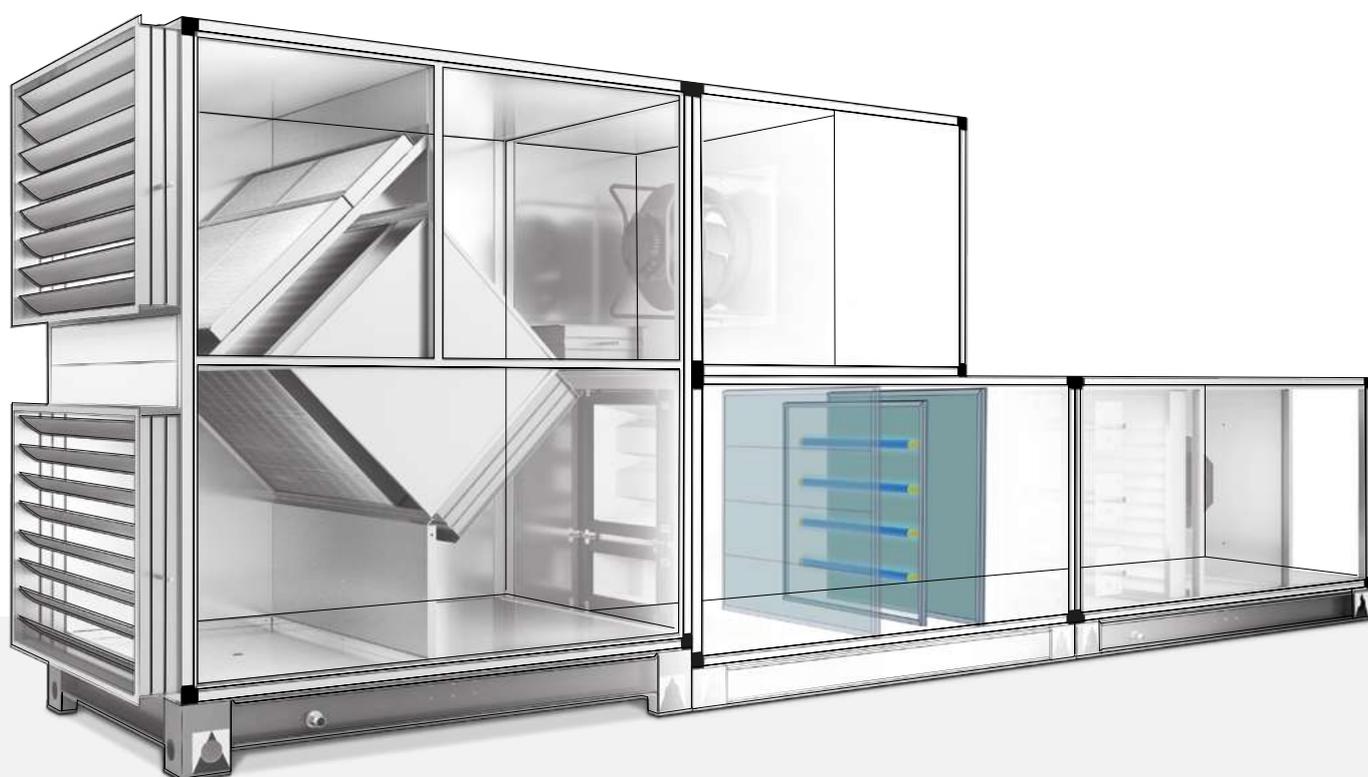

High air sanitation


The Photo-Catalytic Oxidation System is a technology studied for over 20 years and applied and validated in multiple applications on an international scale. It is mainly based on the use of titanium dioxide as a photographic catalyst in synergy with a powerful UVC light capable of generating powerful oxidizing hydroxyl radicals and superoxide ions that destroy gaseous contaminants. All reactions occur on the surface of the photo-catalyst in the airflow path ensuring 100% contact with all contaminants



The mechanism of operation occurs through a chemical and biological destruction deriving from a photocatalytic oxidation process (PCO) that reduces and destroys gaseous contaminants, VOCs and odour molecules. Everything happens through a powerful UVC light, able to break down the DNA of all biological microorganisms (moulds/fungi, bacteria and viruses) making them no longer vital and therefore no longer able to reproduce, proliferate and infect.

This process, besides being particularly efficient, guarantees the total absence of ozone.

# Innovation and constant search *for maximum efficiency*

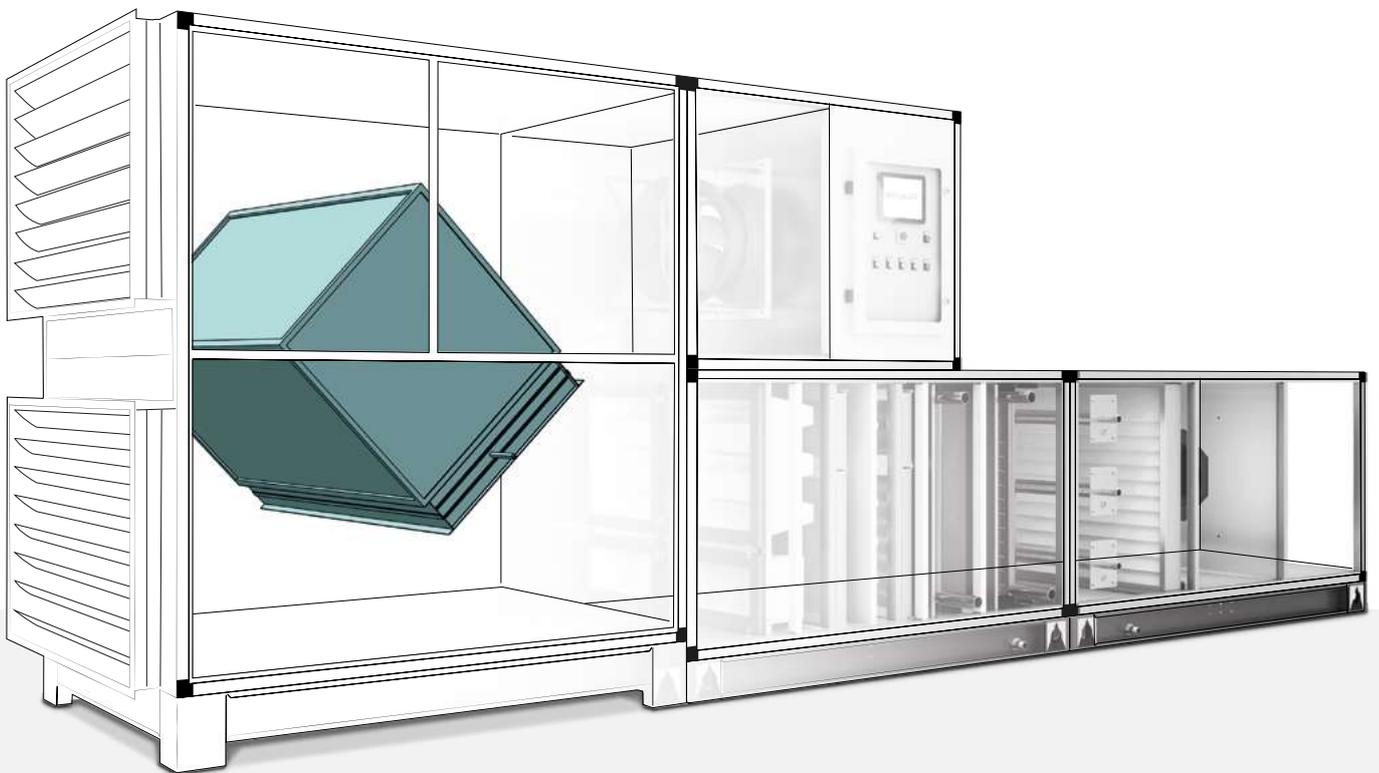

We never stop and want to  
achieve the best possible  
outcome for you


For us, efficiency means guaranteeing ideal comfort while reducing energy expenditure, in order to limit operating costs and preserve the environment by reducing CO<sub>2</sub> emissions.

To achieve this goal, we rely on innovative design choices, which we apply rigorously and consistently in our product ranges in order to be able to provide solutions capable of meeting the ever-increasing demands for high efficiency required today by the market.




### CURRENT PLATE HEAT EXCHANGERS

An aluminium plate heat exchanger in counter-current that allows to increase the volume of exchanged air, guaranteeing very high recovery efficiency, reducing the overall dimensions, ensuring robustness and high resistance values to the differential pressure with a recovery efficiency up to 93% .  
Through such high-efficiency values, it is possible to compensate the electric consumption values of the fans, thus allowing to configure more compact air handling units.

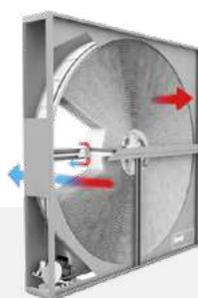

### ROTARY ENTHALPIC HEAT EXCHANGERS

Rotary heat exchangers that allow the exchange not only of heat but also of humidity. Utilising a desiccant wheel to transfer sensitive and latent thermal energy with very high efficiency.  
Aluminium matrix coated for moisture transmission in winter and summer, consisting of a cylindrical rotor and a containment frame complete with special seals to minimize the leakage between the inflow and expulsion air flows.  
Also available with specific treatments to work in an aggressive atmosphere, such as applications located in coastal areas.

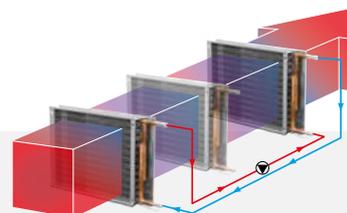

### SINGLE-FLOW ENERGY TRANSFER SYSTEM


The use of the S.E.T. System allows significant energy savings with double benefits: eliminating post-heating needs in the summer and reducing the need for refrigeration compared to traditional cross-flow recovery systems.  
The level of COP in recovery is very high, and it is essentially due to an important power recovered in the face of very low-pressure drops, offering higher seasonal energy savings compared to traditional recovery systems.

# Focus Point

## *Single-flow energy transfer system*


The S.E.T. system consists of a dual coil system hydraulically circulated on the summer cooling coil: in which the heat of the hot air entering the system is captured by the first coil and then transferred, via a circulator, to the post-heating coil. There is, therefore, a double benefit: both the reduction of the post-heating requirement and the reduction of the cooling requirement through the pre-cooling operated by the first coil.

The SET. System is a recovery system that can only be used in the summer season. The heat recovery unit in the summer season is mainly bypassed to allow the correct operation of the S.E.T. System.

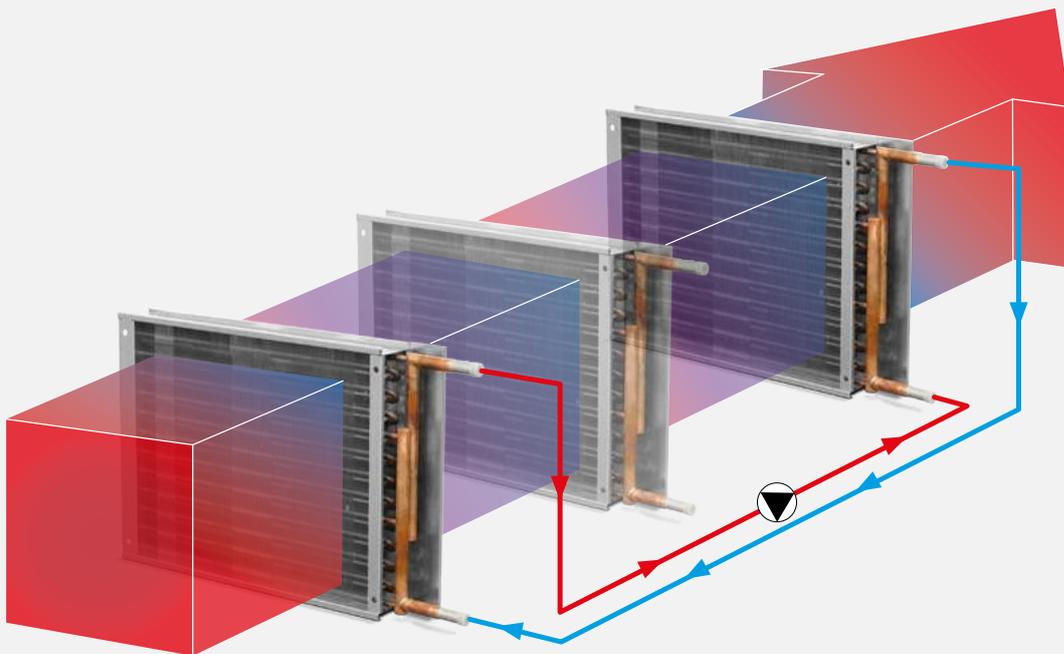



## Transformation Psicro-metrica S.E.T. System

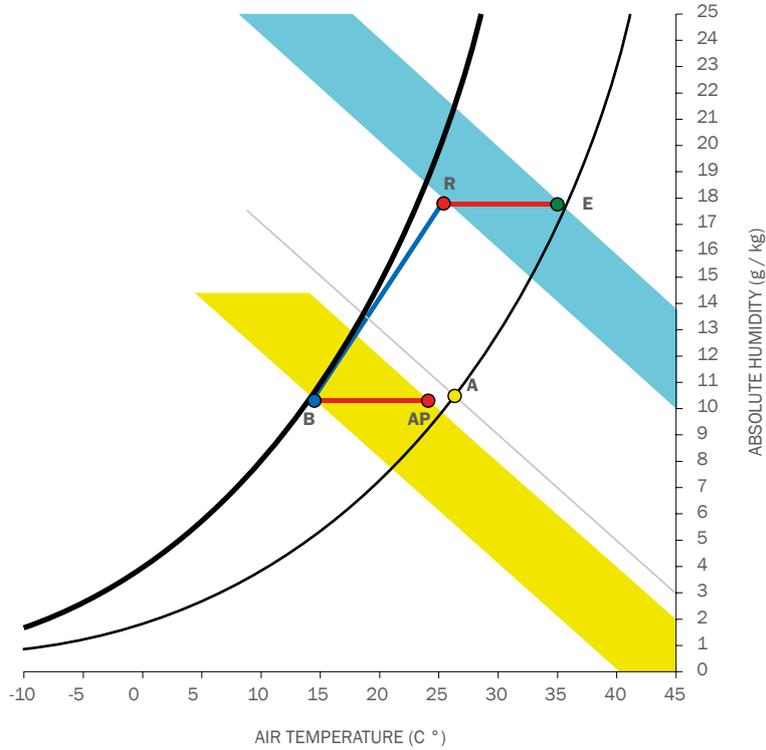



The share of pre-cooling energy (E-R) is transferred to the post-heating (B-AP)

## Annual energy analysis


The following data refer to:

AHU flow: 10.000 cm<sup>3</sup>/h, City: Milano, Costs Energy Consumption: 0.17 €/kW, Methane Cost: 0.85 €/mc

Summer Post: Boiler/Boiler | Filter: Fiber/Fiber | Coil: Round/Round

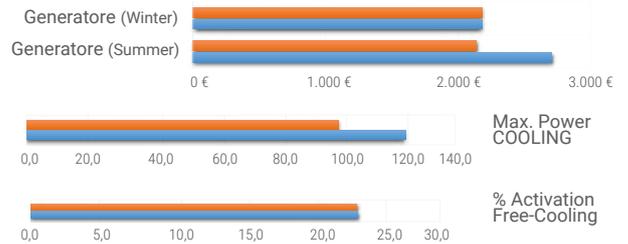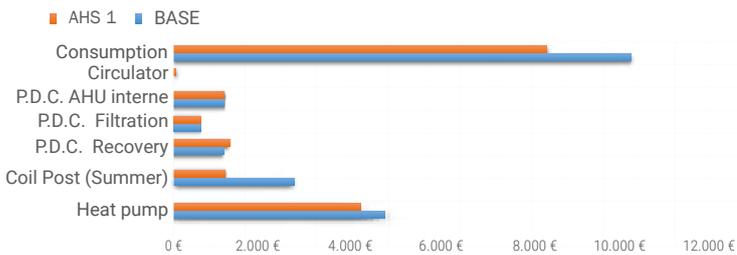

### MILAN TEMPERATURE ANNUAL TREND

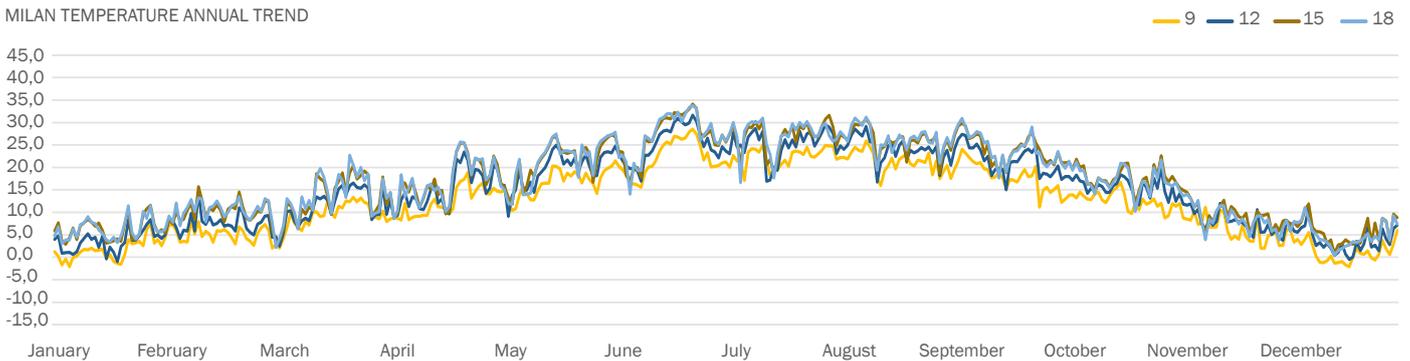



Plus

# Technical solution with *combined hydronic recovery solution*



Technical solution for air handling units treating primary air with recovery coils.


Compared to traditional recovery configurations, the benefit of this solution is the absolute guarantee of the absence of contamination between the supply and return flows, the significant reduction in annual consumption and the compactness of the units

The possibility of creating customized solutions, in configuration and dimensions, make it a highly flexible product for every use.



# Focus Point

## *Fan Wall system*

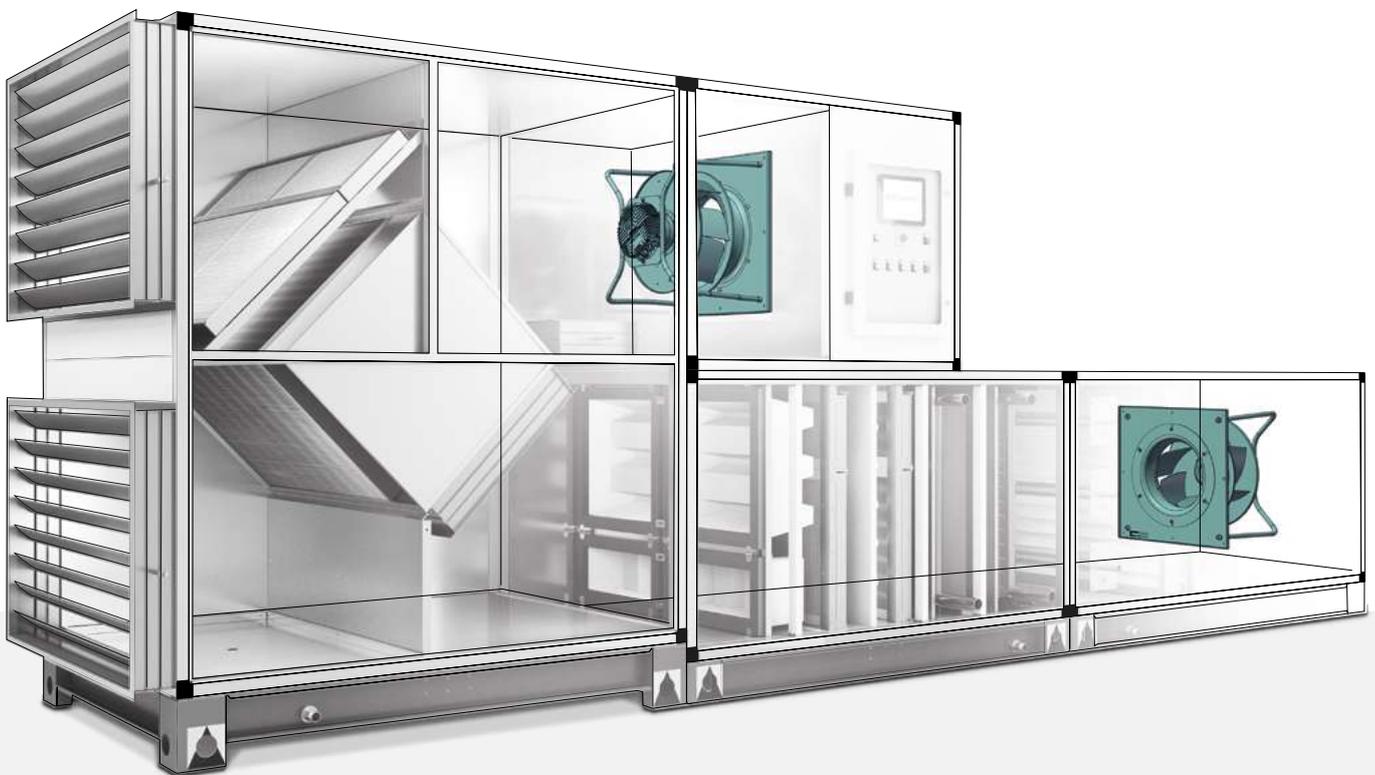

Reduction in consumption  
and compact dimensions


The Mekar range of products, in addition to being equipped with high-performance plug fan or external rotor motor fans, can also be configured with the innovative Fan Wall System solution that ensures significant benefits including:

- Redundancy and guarantee of operations.
- Ease of maintenance and handling.
- Reduction of consumption.
- Greater compactness of the unit.
- Uniformity of the airflow on the exchangers



# Focus Point

## Control system

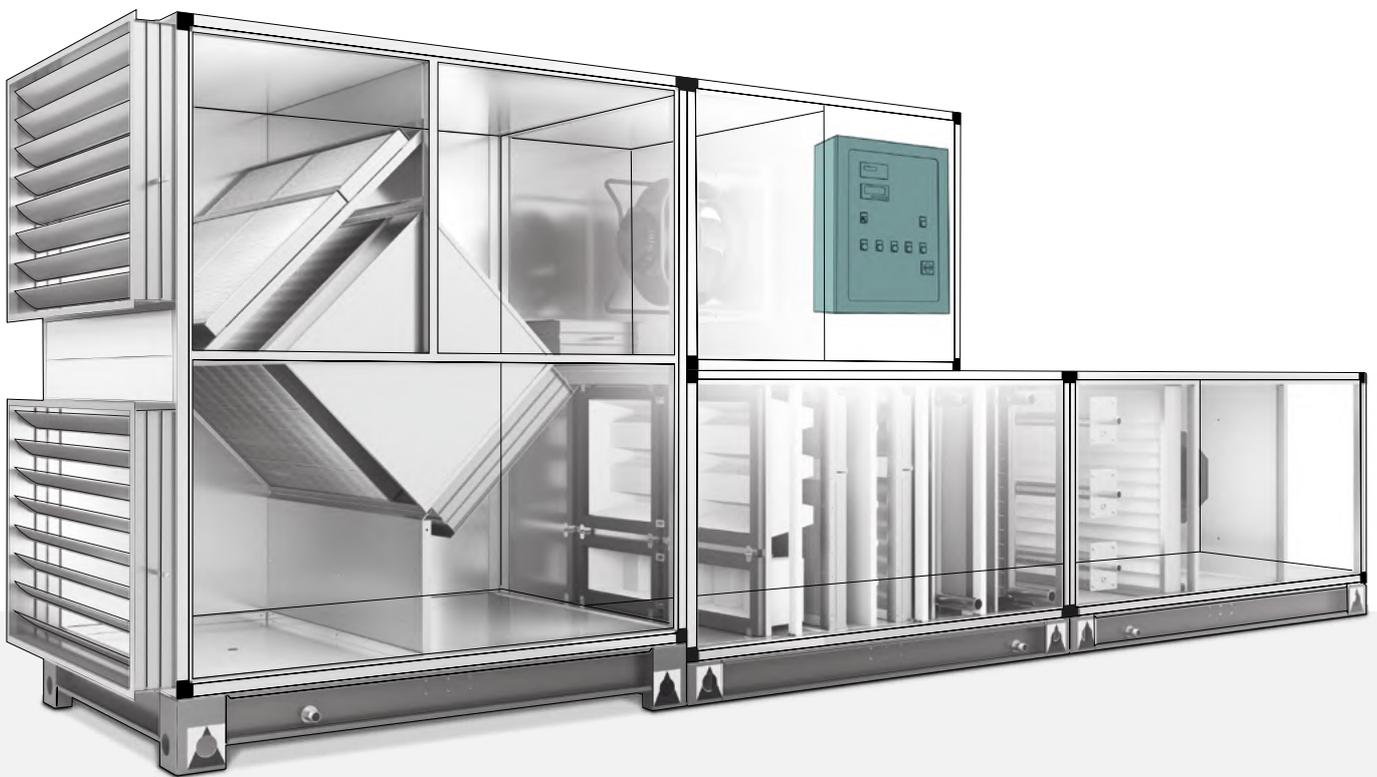

DeviceNet™

EtherNet/IP™

PROFI<sup>®</sup>  
NET

PROFI<sup>®</sup>  
BUS

KNX

WebServer

M-Bus

Modbus

ASHRAE BACnet<sup>®</sup>

CANopen

LonWorks

SNMP

We aim to provide integrated, functional and complete solutions capable of responding to the most specific needs, with considerable added value and reliability for our customers.

For this reason, over the years MEKAR has also specialized in the supply of units complete with regulation and controls, all made directly in the company by highly qualified personnel and technicians specialized and able to satisfy any control request. A complete 360° service, which ranges from the development of the customer's specific requests, to the design and parameterization, complete with control panels in order to provide accurate performance within the design parameters.

The configuration of the functionalities and accessories can be done directly through the Mekar selection software, which allows the configuration of the solution in terms of regulation more suited to one's needs

The possibility of offering complete adjustment units, in addition to guaranteeing the customer a Plug&Play solution, allows the use of a product that has been fully tested and calibrated directly in the company, allowing not only a considerable saving in installation time but also a greater guarantee of functionality and reliability of the product, all managed by an internal team

Mekar, through its network of service centres distributed throughout the national territory, and thanks to specialized internal technicians, is also able to offer a complete support service as far as concerns on-site assistance, whether it relates to start-up or to assistance services in general.

